

# Yard Scrapers

## Flexi All Rubber Scraper




- With a simple pull cord latch mechanism, scrapers can be pulled or push as needed
- Fully adjustable wings to give 3 variable working widths from 1.7m (6ft) – 2.47m (8ft)
- Scraping beam is heavy duty structural channel and reinforced fabricated plate
- Specially designed 50mm thick x 400mm high flexible moulded rubber for long life and efficient scraping
- Heavy duty structural 3pl box frame with computer aided design for increased drag efficiency giving better ground pressure for a cleaner sweep
- Optional linkage settings to suit most tractors up to 95hp with Cat 1 and 2 lift pin options
- Speedy clean sweep
- A frame quick hitch is available as an optional extra




Model	Operating width	Blade height	Weight	Rubber blade thickness
Flexi All Rubber	1.7m – 2.47m	400mm	176kg	50mm

# Yard Scrapers

## Heavy Duty All Rubber Scraper

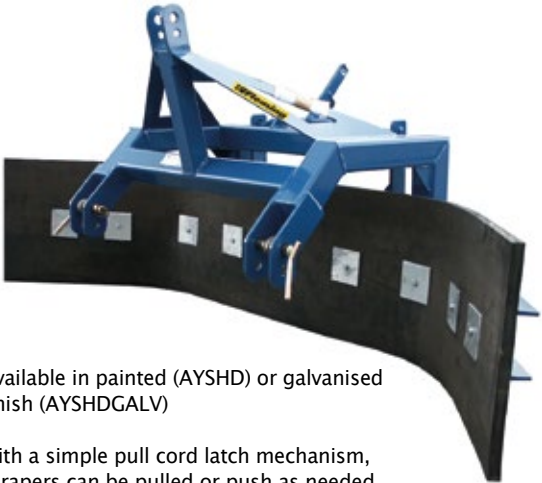

- Available in painted (AYSHD) or galvanised finish (AYSHDGALV)
- With a simple pull cord latch mechanism, scrapers can be pulled or push as needed
- A set working width of 2.1m
- 25mm thick x 500mm high flexible fibre, reinforced, hard wearing rubber
- Heavy duty structural box 3pl frame with computer aided design for increased drag efficiency giving better ground pressure for a cleaner sweep
- Optional linkage settings to suit most tractors up to 95hp with Category 1 and 2 lift pin options
- Speedy clean sweep
- Lower link points for smoother scraping



Model	Operating width	Blade height	Weight	Rubber blade thickness
Heavy Duty All Rubber	2.1m	500mm	150kg	25mm


# Yard Scrapers

## Standard All Rubber Scraper



(AYS)

- Available in painted (AYS) or galvanised finish (AYSGALV)
- With a simple pull cord latch mechanism, scrapers can be pulled or push as needed
- A set working width of 2.1m
- 25mm thick x 400mm high flexible fibre, reinforced hard wearing rubber
- Structural 3pl box frame with computer aided design for increased drag efficiency giving better ground pressure for a cleaner sweep
- Optional linkage settings to suit most tractors up to 75hp with Category 1 and 2 lift pin options
- Speedy clean sweep

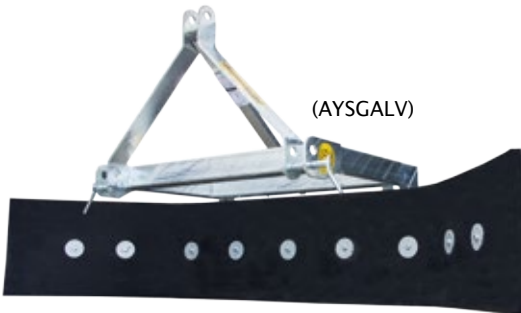

(AYSGALV)

Model	Operating width	Blade height	Weight	Rubber blade thickness
Standard all rubber	2.1m	400mm	126kg	25mm